



EMO E61x 1U POWER DISTRIBUTION PANELS

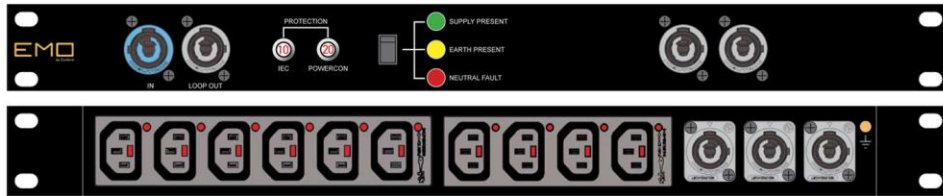


42-611 EMO E611 POWER DISTRIBUTION PANEL

20A Powercon In/Loop Out, 10x 10A IEC Lock & 5x 20A Powercon Out, 10A & 20A overcurrent thermal circuit breakers

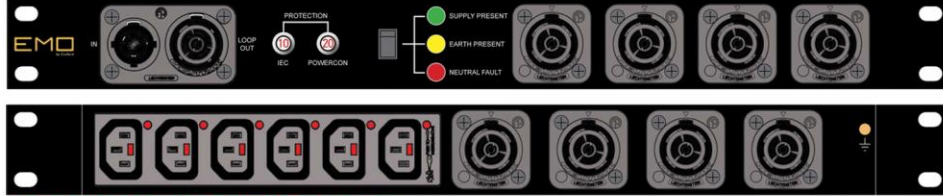


42-612 EMO E612 POWER DISTRIBUTION PANEL

16A Powercon TOP In/Loop Out, 6x 10A IEC Lock & 8x 16A Powercon TOP Out, 10A & 20A overcurrent thermal circuit breakers

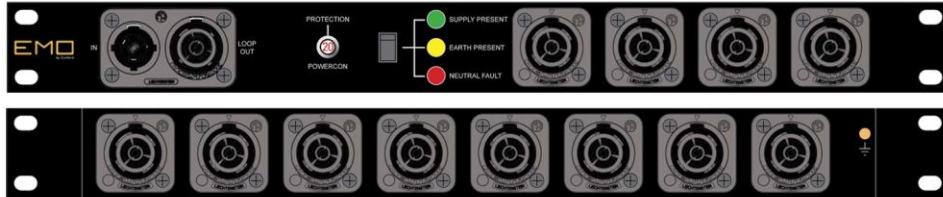


42-613 EMO E613 POWER DISTRIBUTION PANEL

16A Powercon TOP In/Loop Out, 12x 16A Powercon TOP Out, 20A overcurrent thermal circuit breakers

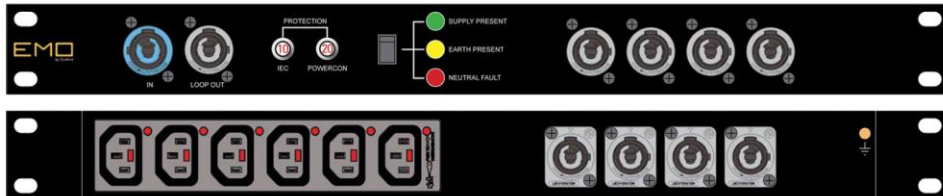

42-614 EMO E614 POWER DISTRIBUTION PANEL

20A Powercon In/Loop Out, 6x 10A IEC Lock & 8x 20A Powercon Out, 10A & 20A overcurrent thermal circuit breakers

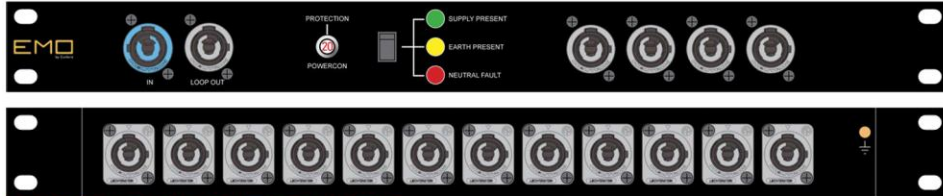

42-615 EMO E615 POWER DISTRIBUTION PANEL

20A Powercon In/Loop Out, 16x 20A Powercon Out, 20A overcurrent thermal circuit breakers

42-611 EMO E611 POWER DISTRIBUTION PANEL

42-612 EMO E612 POWER DISTRIBUTION PANEL

42-613 EMO E613 POWER DISTRIBUTION PANEL

42-614 EMO E614 POWER DISTRIBUTION PANEL

42-615 EMO E615 POWER DISTRIBUTION PANEL

A choice of 20 Amp Powercon, 16 Amp Powercon TOP and 10Amp locking IEC input and output connector options housed in a compact robust, 1U steel enclosure for 'on the road' applications where size and weight considerations are paramount.



All models have LED "traffic light" indicators to show Supply Present, Earth Present and Neutral Fault status which can be disabled via a rocker switch for low light on stage use and to enable PAT testing. All output connectors are wired via overcurrent thermal circuit breakers. Earth grounding points feature on the rear of all models as standard. 100mm depth rear steel enclosure.

EMO E61x 1U POWER DISTRIBUTION PANELS

Configurations:

Model	Inlet	Front Panel	Rear Panel
E611	20A Powercon In/Loop Out	2 x 20A Powercon 10A & 20A overcurrent thermal circuit breakers	10 x 10A IEC Lock 3 x 20A Powercon
E612	16A Powercon TOP In/Loop Out	4 x 16A Powercon TOP 10A & 20A overcurrent thermal circuit breakers	6 x 10A IEC Lock, 4 x 16A Powercon TOP
E613	16A Powercon TOP In/Loop Out	4 x 16A Powercon TOP 20A overcurrent thermal circuit breaker	8 x 16A Powercon TOP
E614	20A Powercon In/Loop Out	4 x 20A Powercon 10A & 20A overcurrent thermal circuit breakers	6 x 10A IEC Lock 4 x 20A Powercon
E615	20A Powercon In/Loop Out	4 x 20A Powercon, 20A overcurrent thermal circuit breaker	12 x 20A Powercon

Dimensions:

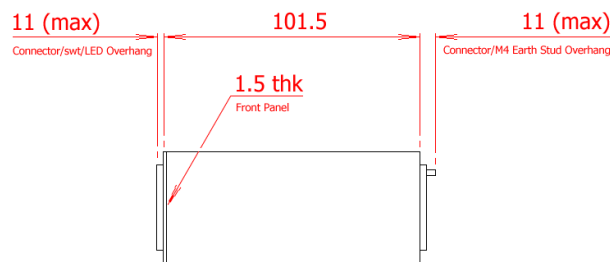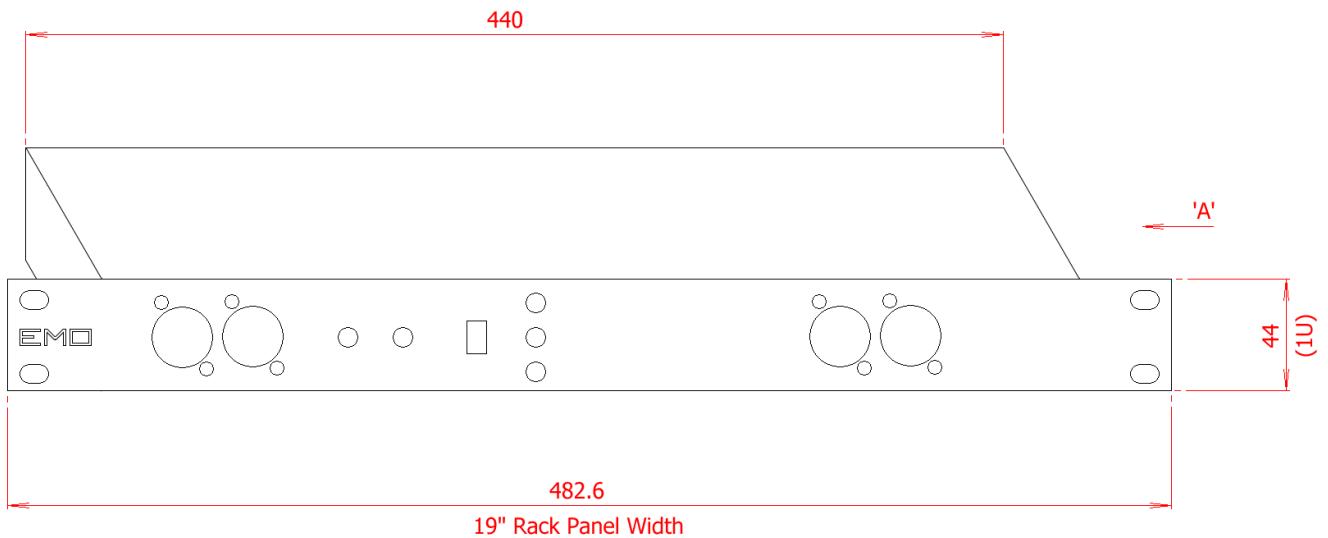

NOTES:
Overhang dependent on model/connectors used
Not to scale
All dims in mm

View on 'A'